

Check Valves

PA NAM Check Valves are specially designed & manufactured for flow control of fluids and gases in corrosive & hazardous environment. These valves are used in Process control, instrumentation and flow control applications.

Valves are precision machined with designer durability and maximum efficiency to provide high quality and low cost alternatives in fluid and gaseous control systems of different applications, to meet the exact standards of our customers growing demands.

Features

Available in High Grade Stainless Steel, Brass materials.

Variety of end connections includes Male / Female threaded NPT, BSP, BSPT, ISO, DIN and JIS tapered pipe ends.


100% factory tested for both crack & reseal.

Complete Heat Traceability.

Material of Construction

Sr No.	Part	Qty.	Material
1	Body (Outlet)	1	A479-316 S.S. / Alloy B16, Copper Alloy # 360
2	Body (Inlet)	1	A479-316 S.S. / Alloy B16, Copper Alloy # 360
3	Spring	1	302 S.S. / A313
4	'O' Ring	1	VITON / BUNA N
5	Poppet	1	A479-316 S.S. / Alloy B16, Copper Alloy # 360
6	Back Ferrule	1	316 S.S. / Alloy B16, Copper Alloy # 360
7	Front Ferrule	1	316 S.S. / Alloy B16, Copper Alloy # 360
8	Nut	1	316 S.S. / Alloy B16, Copper Alloy # 360

Optional TFE coated springs and elastomer seal are available upon request

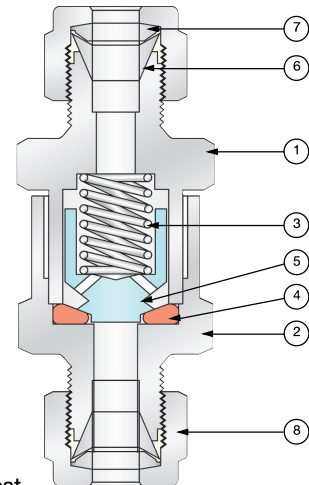

Pressure / Temperature Ratings

Pressure Rating

316SS	1/8" to 3/4"	5000 psig CWP (345 bar)
	1"	3000 psig CWP (207 bar)
Brass	1/8" to 1"	3000 psig CWP (207 bar)

Orifice 1.078" to 0.656"
(2.0 mm to 16.7 mm)

Cv Factor 0.18 to 6.56


Working temperatures

Viton seal	-15° F to 375° F (-26°C to 190°C)
Fluorocarbon Rubber	-15° F to 400° F (-26°C to 204°C)
Buna - N Rubber	-30° F to 275° F (-34°C to 135°C)
Neoprene Rubber	-45° F to 250° F (-43°C to 121°C)

Working-Choice of fixed pressure cracking points from 1/3 to 25 psi (.02 to 1.75 bar) or as per customers requirements.

Note:-Valves may initially crack at higher than subsequent cracking pressure if are not actuated for a period of time.

Check Valve Dimensions

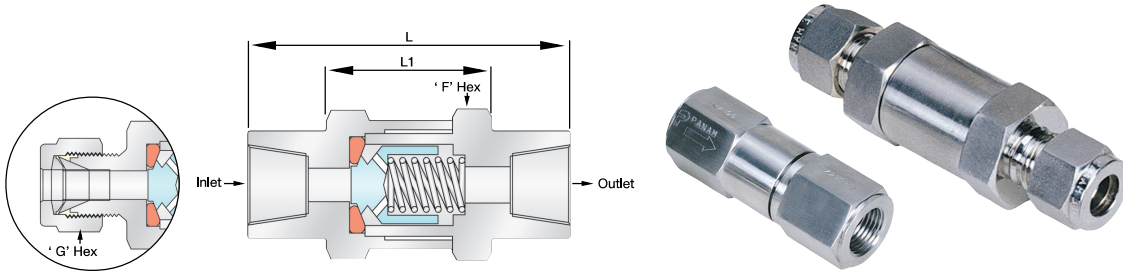

Part No	Inlet	Outlet	L	L1	F Hex	G Hex
PCV-02-SS-OD	1/8" OD	1/8" OD	68.50	33.50	19.00	11.00
PCV-02-SS-FF	1/8" Female NPT	1/8" Female NPT	50.00	33.50	19.00	
PCV-02-SS-MM	1/8" Male NPT	1/8" Male NPT	53.50	33.50	19.00	
PCV-M06-SS-OD	6mm OD	6mm OD	72.00	33.50	19.00	14.00
PCV-04-SS-OD	1/4" OD	1/4" OD	72.00	33.50	19.00	14.00
PCV-04-SS-FF	1/4" Female NPT	1/4" Female NPT	60.00	33.50	19.00	
PCV-04-SS-MM	1/4" Male NPT	1/4" Male NPT	62.50	33.50	19.00	
PCV-04-04-SS-MOD	1/4" Male NPT	1/4" OD	66.00	33.50	19.00	14.00
PCV-04-M06-SS-MOD	1/4" Male NPT	6mm OD	66.00	33.50	19.00	14.00
PCV-M08-SS-OD	8mm OD	8mm OD	72.00	33.50	19.00	16.00
PCV-06-SS-OD	3/8" OD	3/8" OD	73.50	33.50	19.00	17.50
PCV-06-SS-FF	3/8" Female NPT	3/8" Female NPT	60.00	34.00	22.00	
PCV-06-SS-MM	3/8" Male NPT	3/8" Male NPT	62.50	33.50	19.00	
PCV-M10-SS-OD	10mm OD	10mm OD	74.50	33.50	19.00	19.00
PCV-08-SS-OD	1/2" OD	1/2" OD	79.00	34.00	22.00	22.00
PCV-08-SS-FF	1/2" Female NPT	1/2" Female NPT	84.00		32.00	
PCV-08-SS-MM	1/2" Male NPT	1/2" Male NPT	73.00	34.00	22.00	
PCV-08-08-SS-MOD	1/2" Male NPT	1/2" OD	76.00	34.00	22.00	22.00
PCV-08-M12-SS-MOD	1/2" Male NPT	12mm OD	76.00	34.00	22.00	22.00
PCV-M12-SS-OD	12mm OD	12mm OD	79.00	34.00	22.00	22.00
PCV-10-SS-OD	5/8" OD	5/8" OD	106.00	60.00	32.00	25.40
PCV-M16-SS-OD	16mm OD	16mm OD	106.00	60.00	32.00	25.40
PCV-12-SS-OD	3/4" OD	3/4" OD	106.00	60.00	32.00	25.40
PCV-12-SS-FF	3/4" Female NPT	3/4" Female NPT	84.00		35.00	
PCV-12-SS-MM	3/4" Male NPT	3/4" Male NPT	99.00	60.00	32.00	
PCV-12-12-SS-MOD	3/4" Male NPT	3/4" OD	102.50	60.00	32.00	28.50
PCV-16-SS-OD	1" OD	1" OD	118.00	65.00	35.00	38.00
PCV-16-SS-FF	1" Female NPT	1" Female NPT	98.50		40.50	
PCV-16-SS-MM	1" Male NPT	1" Male NPT	115.00	65.00	35.00	
PCV-16-16-SS-MOD	1" Male NPT	1" OD	118.00	65.00	35.00	38.00
PCV-M25-SS-OD	25mm OD	25mm OD	118.00	65.00	35.00	38.00

All dimensions are in millimeters unless otherwise specified. Dimensions are for reference only, subject to change.